


Fig. 1

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

33

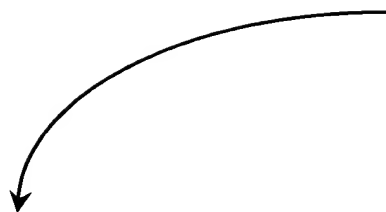

Primitive	Description
SETUP	Create and set-up leg and call according to H323/ISDN voice protocol (include attributes of any existing legs)
Call Proceed	Send indication of responsibility for the call according to H323/ISDN voice protocol
Call Alert	Send indication of call-destination to target node according to H323/ISDN voice protocol
Call Connect	Establish voice communication (channels) over completed call-leg including end-node legs
Call Reject	Reject incoming leg if not available (send H323 reject message)
Call Release	Drop call-leg but maintain in established state of alert
Call Join	establish voice communication of dropped leg with another leg or legs at the site.
Call Disjoin	Break voice communication from one leg to other legs on site with option to maintain in established state

**Fig. 2**

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

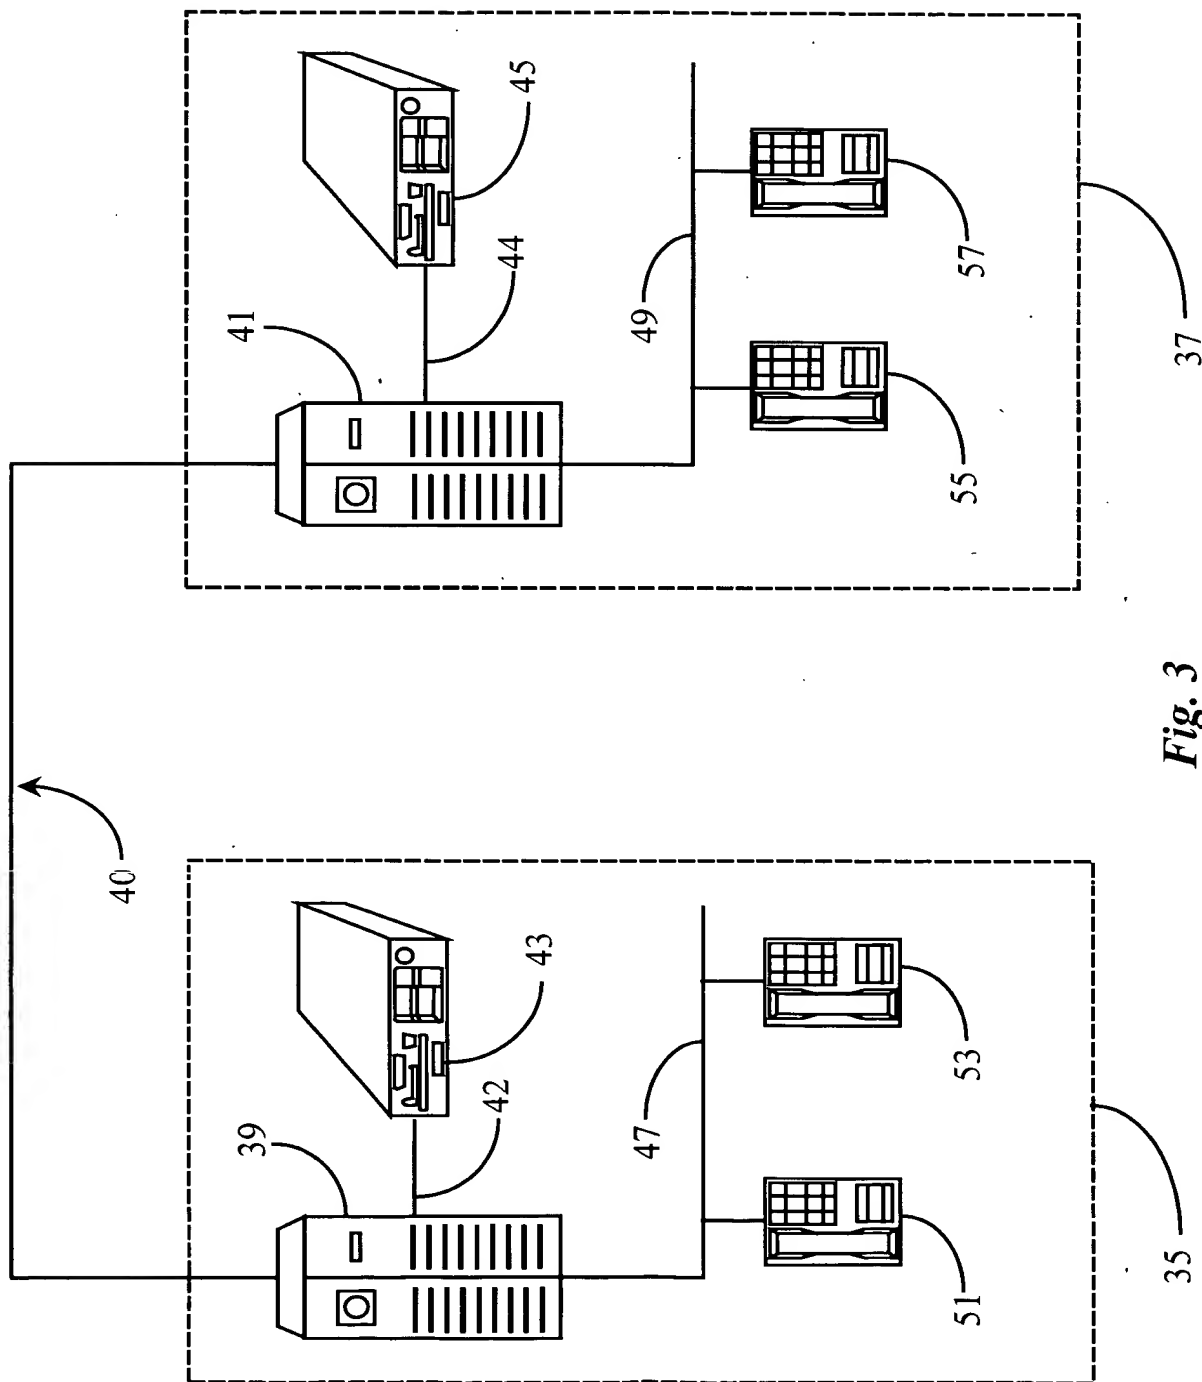


Fig. 3